


Installation

GES's range of solar powered subfloor fans are flexible and suitable for a range of applications and ideal for DIY.

If you don't fancy installing sub floor ventilation yourself, you may contact your local dealer to organise a quote, inspection or installation.


Below are a few examples of how GES's solar fans may be installed to accommodate standard scenarios requiring sub floor ventilation.

Subfloor Ventilation System Ducting Options

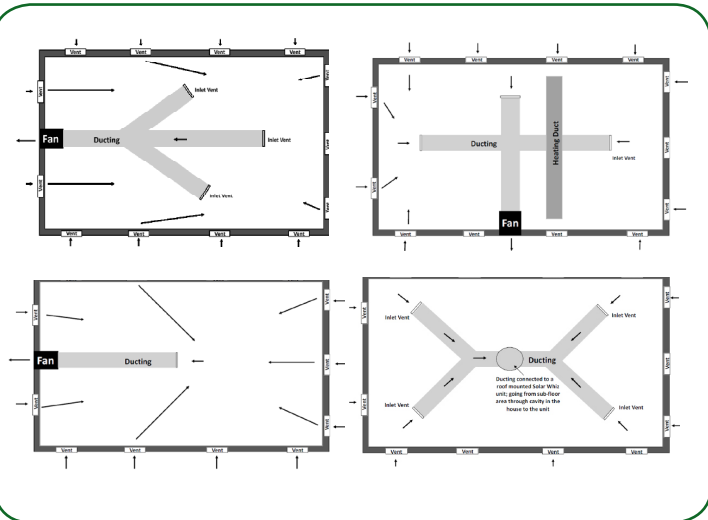

Benefits of our systems:

- Unlike powered, timer operated fans our solar powered fan systems run when the sun is out and therefore generally deliver fresh and dry air optimising the effect of your subfloor ventilation.
- The solar powered operation ensures optimum timing, fan speed as well as quiet operation without power consumption.
- Besides protecting the structural integrity of your house; effective sub floor ventilation will normally also result in improved air quality inside the house and reduce the risk of developing asthma symptoms and respiratory problems. Sub floor ventilation therefore help you look after the health of your family as well as that of your house.



SIMPLE
INSTALLATION



Mould on ceiling as a result of poor ventilation.



Call us: 1300 655 118

www.solarventilation.com.au



Global Eco & Environmental Solutions

Visit our showroom at:

1135 Toorak Rd, Camberwell, VIC 3124

Or contact your local dealer:



Warranty

GES's subfloor fans are designed and developed based on many years experience with various other solar ventilation systems.

We offer a 10 year warranty on PV panels and a 2 year warranty on all other components. Extended warranty is available upon request.

Delivery available Australia wide

Disclaimer: Global Eco & Environmental Solutions does not accept any responsibility for events that result from the use of this product or the information provided in this brochure.

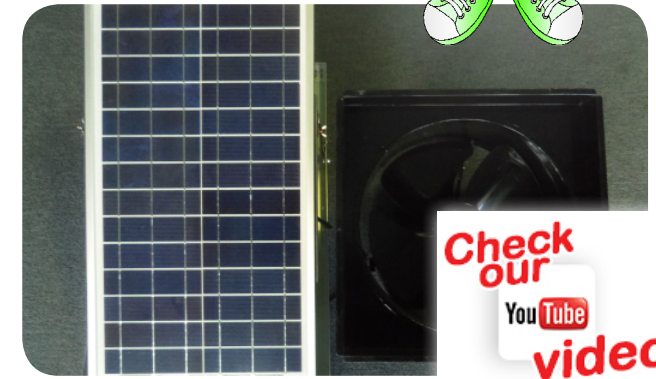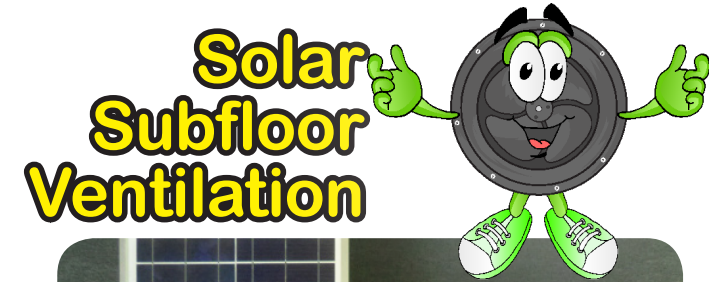

Is your subfloor damp?
Does your house smell musty?
Is there condensation throughout the house?
Do you have problems with mould, mustiness or rotting floor boards?

Make these problems a thing of the past!
Our Solar powered Subfloor Ventilation system may be the solution you are looking for!

www.solarventilation.com.au

Importance of subfloor ventilation

Effective ventilation of the subfloor area is essential to the health and longevity of any building with a subfloor area as well as its occupants. Permanent high moisture levels may cause irreversible damage to the structure of the house. A damp subfloor will normally result in poor air quality and high humidity levels inside the house.

Look out for symptoms inside the house such as condensation on windows, mustiness, mould and mildew, which normally are strong indicators of high humidity levels in your home – and often caused by damp subfloors.

These symptoms are not only unsightly but also pose respiratory health risks such as asthma and allergies and may also cause skin irritations.

Damage caused by poor ventilation in subfloor areas

Damp subfloors are the result of high humidity levels under houses. Mould and other fungi thrive in damp environments, and may result in rotting stumps and floor boards as well as cause odours and musty smells throughout the house.

Dampness creates ideal breeding grounds for termites, white ants and wood borers. Which is likely to cause major damage in the subfloor areas. A damp subfloor may also cause rising damp resulting in serious damage to painted surfaces and internal walls.

Subfloor ventilation - How & Why

Ideally every house with a subfloor area would have effective cross flow ventilation under the house.

Some of the main reasons for lack of ventilation include:

- Heating ducts blocking air flow
- Few or no vents
- Small or blocked vents
- Having vents only on one side of the subfloor area

Fan assisted ventilation and ducting may alleviate these situations, however, it is also important to address fundamental issues.

For optimum results locating fans and inlets to achieve cross-ventilation is of utmost importance.

It is most effective to run fans during the day as the replacement for the air removed will be warmer and drier. Operating sub floor ventilation systems during wet weather will normally increase the moisture levels - not reduce them!

Should you wish to operate your fan/s on a timer or at night, GES offers 12 and 24 volt power supplies and day/night packs which can be powered via a regular 240V power point.

Prevention of subfloor issues

Global Eco & Environmental Solutions (GES) has, since 2006, successfully solved many customers severe damp problems with a unique approach that involves using one, multiple, or a combination of products that it has to offer.

Solar Whiz

The Solar Whiz gable fan is due to its unique design extremely effective for extracting air from the subfloor and may, depending on the situation, be used with or without ducting for addressing damp issues and bringing fresh replacement air into the affected subfloor area.

Solar Air Module (SAM)

A SAM system may be installed to address problems in particularly difficult/wet areas by supplying warm dry air into problem areas, which will raise the evaporation rate and increase the drying effect. A second fan will then be installed on the opposite side of the building to ensure the moisture is removed.


Inline Fans

When there is less than 250 mm clearance for mounting the fans, GES offers a range of medium and high volume solar powered fans. These are available in 150mm, 230mm or 330mm external diameter; offering a multitude of space effective options for subfloor ventilation.



Roof Mounted Solar Whiz

If the subfloor area isn't accessible, a simple but effective way to ventilate the subfloor area is to mount a Solar Whiz on the roof (or in the gable) - and draw moist air out from the subfloor via a duct.

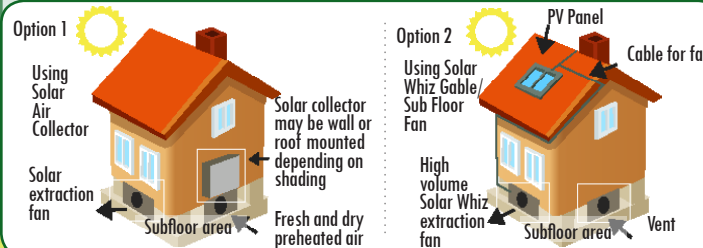

Specifications

Model	SUB0700G	SUB0900G	SUB1400G	SUB2100G	SUB1700	SUB1200	SUB0490	SUB0350	SUB1112	SUB1111
Max. Airflow Capacity at 0 press.	700 m ³ /h (w/o cover)	900 m ³ /h (w/o cover)	1400 m ³ /h (w/o cover)	2100 m ³ /h (w/o cover)	1700 m ³ /h (w/o cover)	1200 m ³ /h	490 m ³ /h (w/o louvre vent)	350 m ³ /h (w/o louvre vent)	490 m ³ /h (w/o cover)	350 m ³ /h (w/o cover)
Cover / Louvre	Louvre	N/A	N/A	N/A	Louvre	N/A	Louvre	Louvre	N/A	N/A
PV Panel Polycrystalline High Impact Resistant	10 Watt Adjustable Tilt frame	10 Watt Adjustable Tilt frame	20 Watt Adjustable Tilt frame	35 Watt Adjustable Tilt frame	25 Watt Sold and supplied separately	25 Watt Sold and supplied separately	35 Watt Sold and supplied separately	18 Watt Sold and supplied separately	35 Watt Sold and supplied separately	18 Watt Sold and supplied separately
Fan Motor	10-24 volt DC brushless motor with double shielded ball bearings	10-24 volt DC brushless motor with double shielded ball bearings	10-24 volt DC brushless motor with double shielded ball bearings	10-24 volt DC brushless motor with double shielded ball bearings	10-24 volt DC brushless motor with double shielded ball bearings	8-18 volt DC brushless motor with double shielded ball bearings	8-18 volt DC brushless motor with double shielded ball bearings	8-18 volt DC brushless motor with double shielded ball bearings	8-18 volt DC brushless motor with double shielded ball bearings	8-18 volt DC brushless motor with double shielded ball bearings
Speed	900rpm	900rpm	1150rpm	1300rpm	1300rpm	1300rpm	2350rpm	1680rpm	2350rpm	1680rpm
Fan Blade	Balanced 4-wing design, ABS polymeric reinforced fan blade with UV protection. Designed for high airflow and low noise- 300mm diameter.	Balanced 4-wing design, ABS polymeric reinforced fan blade with UV protection. Designed for high airflow and low noise- 300mm diameter.	Balanced 4-wing design, ABS polymeric reinforced fan blade with UV protection. Designed for high airflow and low noise- 300mm diameter.	Balanced 4-wing design, ABS polymeric reinforced fan blade with UV protection. Designed for high airflow and low noise- 300mm diameter.	Balanced 4-wing design, ABS polymeric reinforced fan blade with UV protection. Designed for high airflow and low noise- 300mm diameter.	Balanced 3-winged design. Light aluminium providing low mechanical resistance and maximising airflow.	Balanced 3-winged design. Light aluminium providing low mechanical resistance and maximising airflow.	Balanced 3-winged design. Light aluminium providing low mechanical resistance and maximising airflow.	Balanced 3-winged design. Light aluminium providing low mechanical resistance and maximising airflow.	Balanced 3-winged design. Light aluminium providing low mechanical resistance and maximising airflow.
Body	Light weight aluminium alloy	Light weight aluminium alloy	Hot galvanised steel	Hot galvanised steel	Hot galvanised steel	Hot galvanised steel	Cold sheet steel rackets, stainless steel fasteners	Cold sheet steel rackets, stainless steel fasteners	Cold sheet steel rackets, stainless steel fasteners	Cold sheet steel rackets, stainless steel fasteners
Paint	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating	Black electrostatic UV resistant spray cured in high temperature drying process. Anti UV Power Coating
Materials	Cold sheet steel rackets, stainless steel fasteners	Cold sheet steel rackets, stainless steel fasteners	Hot galvanised steel	Hot galvanised steel	Hot galvanised steel	Hot galvanised steel	Cold sheet steel rackets, stainless steel fasteners	Cold sheet steel rackets, stainless steel fasteners	Cold sheet steel rackets, stainless steel fasteners	Cold sheet steel rackets, stainless steel fasteners
Dimensions (mm)	ø: 240 Depth: 275	ø: 500 Depth: 185	ø: 500 Depth: 185	ø: 500 Depth: 185	ø: 350x350 Depth: 215 ø Flange: 330	ø: 330 Depth: 335 ø Flange: 300	ø: 237x247 Depth: 165 ø Flange: 150	ø: 237x247 Depth: 165 ø Flange: 150	ø: 170 Depth: 180 ø Flange: 150	ø: 170 Depth: 180 ø Flange: 150
Packing Size (mm) & Weight	530x530x270 7KG	630x630x230 8KG	630x630x230 8KG	650x650x230 9KG	430x430x250 5KG	340x340x360 4KG	330x330x250 2.5KG	330x330x250 2.5KG	200x190x190 1KG	200x190x190 1KG
Noise Level	<40dBA	<40dBA	<45dBA	<60dBA	<45dBA	<45dBA	<56dBA	<50dBA	<56dBA	<50dBA
Colour				Black Powder Coating						
Solar Air Collectors										

* Global Eco & Environmental Solutions reserves the right to alter any of the information in this document without notification.

For more information and technical specifications on our Solar Air Module (SAM) Units for heating or sub-floor ventilation, please refer to our SAM brochure, visit www.heatwithsolar.com.au, or call 1300 655 118